

DS-PK1-LT-WE Wireless LCD Keypad Quick Start Guide


EN 50131-1+A1+A2+A3
EN 50131-3:2009
EN 50131-5-3:2017
EN 50131-6:2017+A1:2021
EN 50130-4:2011+A1:2014
EN 50130-5:2011
Security Grade 2, Environmental Class II

English


Diagram Reference

1 Appearance

1. Indicator



2. Numeric and Function Key



3. Swipe Tag Area 4. Tamper Switch 5. MCU Serial Port
6. RFM Serial Port 7. Power Switch 8. Touch Key Serial Port

2 Enrollment

3 Installation

★ Check signal strength.


User Manual

Scan the QR code for more information and operation help.

Specification

Wireless Keypad		
RF	Wireless technology	Tri-X, two-way communication
	RF frequency	868 MHz
	RF modulation	2FSK
	RF distance	1200 m (open area)
Interface	LED indicator	Fault (orange), enrollment/signal (red/green), arm (blue), disarm (green), alarm (red)
	Buzzer	Supported
	Power switch	Power on/off
	Tamper-proof	Supported, front and rear
	Serial port	3
	Tag reader built-in	Supported
LCD Display	Numeric key	Number key: 0 to 9 Function key: *, #, query, away arm, stay arm, disarm, output, settings, right, left
	System fault display	Supported
	System status display	Supported
	Operation	Supported
	Configuration	Supported
Electrical & Battery	Power consumption	Quiescent current: 80 μ A Max current: 300 mA Voltage: 3 V
	Battery type	Four CR123 batteries
	Battery life span	Standby time more than two years
	Operation temperature	-10°C to 55°C
Other	Operation humidity	10% to 90%
	Color	White
	Installation method	Wall-mounting
	Dimension (WxHxD)	174.63 mm x 109.62 mm x 25.25 mm
	Weight	With batteries: 348 g Without batteries: 282 g


1

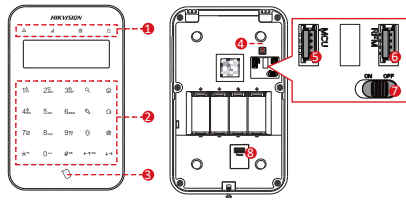


User Manual



2

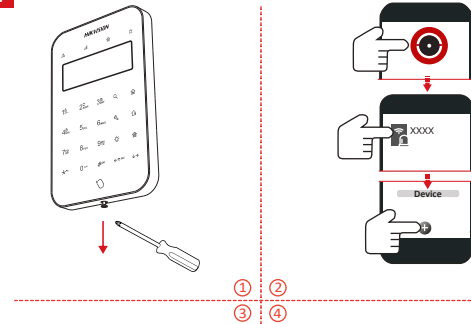

3

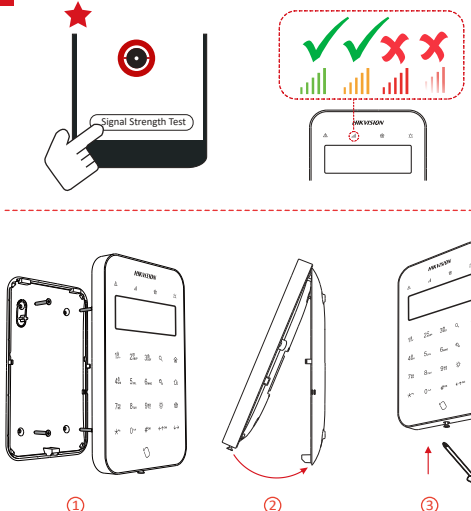

©2022 Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved.

About this Manual

The Manual includes instructions for using and managing the Product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version of this Manual at the Hikvision website (<https://www.hikvision.com/>).

Please use this Manual with the guidance and assistance of professionals trained in supporting the Product.

Trademarks

Hikvision and other Hikvision's trademarks and logos are the properties of Hikvision in various jurisdictions. Other trademarks and logos mentioned are the properties of their respective owners.

Disclaimer

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS MANUAL AND THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND SERVICES ARE PROVIDED "AS IS" AND "WITH ALL FAULTS AND ERRORS". HIKVISION MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE. THE USE OF THE PRODUCT BY YOU IS AT YOUR OWN RISK. IN NO EVENT WILL HIKVISION BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA, CORRUPTION OF SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT (INCLUDING NEGLIGENCE), PRODUCT LIABILITY, OR OTHERWISE, IN CONNECTION WITH THE USE OF THE PRODUCT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSS.

YOU ACKNOWLEDGE THAT THE NATURE OF THE INTERNET PROVIDES FOR INHERENT SECURITY RISKS, AND HIKVISION SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER-ATTACK, HACKER ATTACK, VIRUS INFECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, HIKVISION WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED. YOU AGREE TO USE THIS PRODUCT IN COMPLIANCE WITH ALL APPLICABLE LAWS, AND YOU ARE SOLELY RESPONSIBLE FOR ENSURING THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. ESPECIALLY YOU ARE RESPONSIBLE FOR USING THIS PRODUCT IN A MANNER THAT DOES NOT INFRINGE ON THE RIGHTS OF THIRD PARTIES, INCLUDING WITHOUT LIMITATION, RIGHTS OF PUBLICITY, INTELLECTUAL PROPERTY RIGHTS, OR DATA PROTECTION AND OTHER PRIVACY RIGHTS. YOU SHALL NOT USE THIS PRODUCT FOR ANY PROHIBITED END-USES, INCLUDING THE DEVELOPMENT OR PRODUCTION OF WEAPONS OF MASS DESTRUCTION, THE DEVELOPMENT OR PRODUCTION OF CHEMICAL OR BIOLOGICAL WEAPONS, ANY ACTIVITIES IN THE CONTEXT RELATED TO ANY NUCLEAR EXPLOSIVE OR UNSAFE NUCLEAR FUEL-CYCLE, OR IN SUPPORT OF HUMAN RIGHTS ABUSES. IN THE EVENT OF ANY CONFLICTS BETWEEN THIS MANUAL AND THE APPLICABLE LAW, THE LATTER PREVAILS.

This product and - if applicable - the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under the RE Directive 2014/53/EU, the EMC Directive 2014/30/EU, the RoHS Directive 2011/65/EU

2012/19/EU (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: www.recyclethis.info

2006/66/EC (battery directive): This product contains a battery that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is marked with this symbol, which may include lettering to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling, return the battery to your supplier or to a designated collection point. For more information see: www.recyclethis.info

Caution

+ identifies the positive terminal(s) of equipment which is used with, or generates direct current. - identifies the negative terminal(s) of equipment which is used with, or generates direct current.

No naked flame sources, such as lighted candles, should be placed on the equipment.

The serial port of the equipment is used for debugging only.

Install the equipment according to the instructions in this manual.

To prevent injury, this equipment must be securely attached to the floor/wall in accordance with the installation instructions.

Keep correct direction when moving or using the equipment.

The additional force shall be equal to three times the weight of the equipment but not less than 50N. The equipment and its associated mounting means shall remain secure during the installation.

After the installation, the equipment, including any associated mounting plate, shall not be damaged.

Hangzhou Hikvision Digital Techn

55 Qianmo Road, Binjiang District, Hangzhou 310052, China

Belična tipkovnica	
Radijska frekvencija	Belična tehnologija
	RF frekvencija
	RF modulacija
Sučelje	RF udaljenost
	LED indikator
	Zvučni signal
	Prekidač za napajanje
	Zaštita od neovlaštenog pristupa
	Serijski ulaz
	Ugrađeni čitač oznaka
	Numerička tipka
	Prikaz pogreške sustava
	Prikaz statusa sustava
LCD zaslon	Radna
	Konfiguracija
	Potrošnja energije
Strujno i baterijsko	Vrsta baterije
	Životni vijek baterije
	Ograničenje temperature
	Ograničenje vlage
Ostalo	Iloja
	Način ugradnje
	Dimenzije (š x v x D)
	Težina

[illegible]

		Бездротова клавіатура
Раціонал	Бездротова технологія	Ti-X, двосторонній зв'язок
	Частота радіохвни	868 МГц
	Частотна модуляція	2FSK
	Відстань передавання радіохвни	1200 м (на відкритій місцевості)
Роз'єм	Світлодіодний індикатор	Несправність (оранжевий), реєстрація сигналу (червоний/зелений), постановка на охорону (синій), зв'язки з охороною (зелений), тривога (червоний)
	Зумер	Підтримується
	Виміряні живлення	Живлення увімк./вимк.
	Захист від несанкціонованого доступу	Підтримується, спереду і ззаду
	Послідовний зчитування	3
	Вбудований зчитувач міток	Підтримується
РК-дисплей	Цифрові кнопки	Цифрові кнопки: від 0 до 9 Функціональні кнопки: 7, 8, дзвілок, постановка на охорону без лямки на об'єкт, зв'язки на охорону з лямкою на об'єкт, зв'язки з охороною, вихід, наліштування, правороз, лівороз
	Відображення помилок системи	Підтримується
	Відображення стану системи	Підтримується
	Справочення	Підтримується
Електронна частина й батарея	Налаштування	Підтримується
	Споживання електроенергії	Струм у стані спокою: 80 мкА Максимальний струм: 300 мА Напруга: 3 В
	Тип акумулятора	Чотири батареї CR123
	Спроба служби акумулятора	Час роботи в режимі очікування більше двох років
Інше	Робота системи	Від -10°C до 55°C
	Робота вологість повітря	Від 10% до 90%
	Колір	Білий
	Спосіб установлення	Кріплення на стіні
	Розміри (Ш x В x Г)	174,63 мм x 109,62 мм x 25,25 мм
	Вага	3 батареї: 348 г Без батарей: 282 г

[illegible]

Slovenščina

Referenčni diagram

1 Pregled naprave

1. Indikator

	Napaka		Vpis/moč signala		Aktivirano/deaktivirano		Alarm
--	--------	--	------------------	--	-------------------------	--	-------

2 Stevilski in funkcijske tipke

	Požarni alarm		Alarm za paniko		Medicinski alarm		Zakleni
	Nazaj		OK		Potrdi		

	Aktiviranje, ko ste doma		Aktiviranje ob odhodu		Deaktivirano		Izhod
	Nastavitve		Pozivbe		Pomakni navzgor/izbris		Pomik navzdol

- Povlecite območje oznake
- Serijska vrata MCU
- Stikalo za nedovoljene posege
- Serijska vrata RFM
- Stikalo za vklop/izklop
- Serijska vrata tipk na dotik

3 Vpis

3 Namestitve

Preverite moč signala.

Uporabniški priročnik

Se želite več informacij in pomoč pri delovanju, optično preberite kodo QR.

Tehnični podatki

Brezžična tipkovnica		
RF	Brezžična tehnologija	Tri-X, dvosmerna komunikacija
	RF-frekvenca	868 MHz
	Modulacija RF	2GFSK
	Razdalja RF	1200 m (odprto območje)
	Kontrolna lučka LED	Napaka (oranžna), vpis/signal (rdeča/zelena), opremljena (modra), odpremi (zeleno), alarm (rdeča)
Vmesnik	Brenčilo	Podprta
	Stikalo za vklop/ziklop	Vklop/ziklop napajanja
	Zavzeto pred nedovoljnimi poskusnimi	Podprta, spredaj in zadaj
	Serijska vrata	3
	Vgrajen bralnik oznak	Podprta
LCD zaslon	Numerična tipka	Številčna tipka: 0 do 9 Funkcijska tipka: *, poizvedba, stranska roka, ostane opremljeno, odpremljeno, izhod, nastavitve, desno, levo
	Prikaz sistemske napake	Podprta
	Prikaz stanja sistema	Podprta
	Delovanje	Podprta
	Konfiguracija	Podprta
Elektrika in baterija	Poraba moči	Mirovni tok: 80 µA Največji tok: 305 mA Napetost: 3 V
	Tip baterije	Štiri baterije CR123
	Zvlednjenska doba baterije	Čas pripravljenosti več kot dve leti
	Operativna temperatura	od -10 °C do 55 °C
	Operativna vlažnost	od 10 do 90 %
Drugo	Barva	Bela
	Metoda namestitve	Montaža na steno
	Dimenzije (š x v x g)	174,63 mm x 109,62 mm x 25,25 mm
	Teža	2 baterijami: 348 g Brez baterij: 282 g

[illegible]

Srpski

Referenca dijagrama

1 Izgled

1. Indikator

 Greška  Uvrštavanje/jačina signala  Aktivirano/Deaktivirano  Alarm

2. Numerički i funkcijski tasteri

 Protivpožarni alarm  Alarm za uzbunu  Alarm za medicinsku pomoć  Zaključavanje

 Nazad  OK Potvrda  Alarm za medicinsku pomoć  Zaključavanje

 Alarm za ostanak kod kuće  Alarm za boravak van kuće  Deaktiviraj  Izlaz

 Podašavanje  Upit  ↶ Listaj nagore / Izbrisli  Listaj nadole

3. Oblast prevlaćenja oznake

4. Prekidrač za sprečavanje neovlašćenih izmena

5. MCU serijski priključak

6. RfM serijski priključak

7. Prekidrač za napajanje

8. Serijski priključak sa tasterom na dodir

2 Uvrštavanje

3 Instalacija

★ Proverite jačinu signala.

Korisnički priručnik

Skenirajte QR kod za više informacija i pomoć prilikom rada.

Specifikacija

	Bežična tastatura	
RF	Bežična tehnologija	Tri-X, dvosmerna komunikacija
	RF frekvencija	868 MHz
	RF modulacija	2FSK
	RF razdaljina	1200 m (otvoren prostor)
	LED indikator	Greška (narandlasto), uvrstavanje/signal (rdečno/zeleno), aktiviranje (plavo), deaktiviranje (zeleno), alarm (rdečno)
Interfejs	Zvočni signal	Podržano
	Prekidač za napajanje	Uključi/uključi
	Otporno na neovlašćene izmene	Podržano, na prednjem i zadnjem delu
	Serijski priključak	3
	Ugradeni čitač oznaka	Podržano
LCD prikaz	Numerički taster	Numerički taster: 0 do 9 Funkcijski taster: *, #, ukuć, aktiviranje boravka van kuće, podeljavanja, desno, levo
	Prikaz sistemske greške	Podržano
	Prikaz statusa sistema	Podržano
	Nadnja	Podržano
	Konfigurisanje	Podržano
Rad na struji i bateriji	Potrošnja struje	Struja mirovanja: 80 µA Maks. struja: 300 mA Napón: 3 V
	Tip baterije	Četiri CR123 baterije
	Trajanje baterije	Vreme pripravnosti duže od dve godine
	Radna temperatura	Od -10 °C do 55 °C
	Radna vlažnost	Od 10 % do 90 %
Drugo	Boja	Bela
	Način instalacije	Postavljanje na zid
	Dimenzija (Š x V x D)	174,63 mm x 109,62 mm x 25,25 mm
	Težina	Sa baterijama: 348 g Bez baterija: 282 g

[illegible]

